




# CM20SD-240V

## DIE SET TABLE CM20SD-240V

Die #	Crimp.range	D	L
10*	10.0-12.0	10*	60
12*	12.0-14.0	12*	60
14	14.0-16.0	14	60
16	16.0-19.0	16	60
19	19.0-22.0	19	60
22	22.0-26.0	22	75
26	26.0-30.0	26	75
30	30.0-34.0	30	75
34	34.0-39.0	34	80
39	39.0-45.0	39	80
45	45.0-51.0	45	90
51	51.0-57.0	51	90
57	57.0-63.0	57	100
63	63.0-69.0	63	100
69	69.0-74.0	69	100
74*	74.0-78.0	74*	110
78*	78.0-84.0	78*	110

### Benefit:

Digital Precision Control  
 Quick Change Tool and Die rack  
 Energy Saving and Safety Operation  
 TUV CE Approved

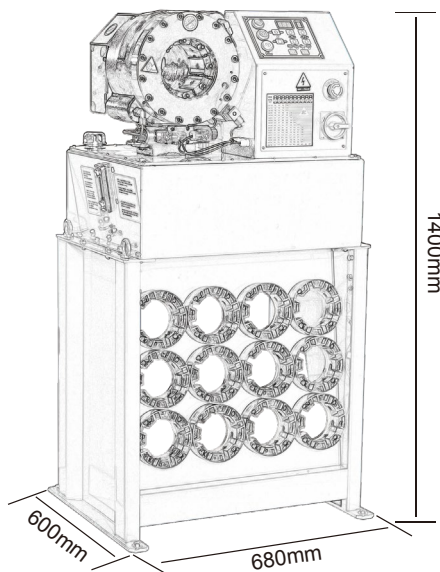

Main Specification	CM20SD-240V
Max Hydraulic Hose	1 1/2" 4SP
Crimping Range mm	4-65
Die Type	P20
Master Die Length mm	80
Max Opening mm	+26
Motor KW	3KW Siemens
Crimping Force KN	1700
Control	Digital Control
Foot pedal	Included
Die Rack	Included
Quick Change Tool	Included
Backstop Device	Optional
Control by Pressure	Optional
Noise Level dBA	65
Protection Class	IP56
L*W*H mm	680*600*1400
Weight KG	270