

CM32S-3PH

DIE SET TABLE CM32S-3PH




Die #	Crimp.range	D	L
10*	10.0-12.0	10*	60
12*	12.0-14.0	12*	60
14	14.0-16.0	14	60
16	16.0-19.0	16	60
19	19.0-22.0	19	60
22	22.0-26.0	22	75
26	26.0-30.0	26	75
30	30.0-34.0	30	75
34	34.0-39.0	34	80
39	39.0-45.0	39	80
45	45.0-51.0	45	90
51	51.0-57.0	51	90
57	57.0-63.0	57	100
63	63.0-69.0	63	100
69	69.0-74.0	69	100
74*	74.0-78.0	74*	110
78*	78.0-84.0	78*	110

* Optional Dies

Benefit:

Full Automatic Control with Foot pedal
 Quick Change Tool and Die rack
 Energy Saving and Safety Operation
 Automatic PLC Control Modual Built in

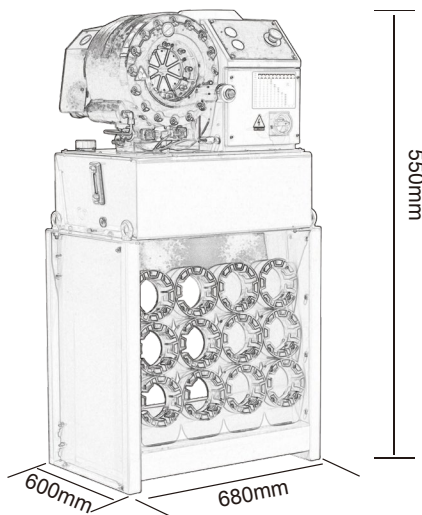

Main Specification	CM32S-3PH
Max Hydraulic Hose	2" 4SP
Crimping Range mm	4-87
Die Type	P32
Master Die Length mm	80
Max Opening mm	+32
Motor KW	4KW Siemens
Crimping Force KN	2200
Control	Control with advanced programmable chip
Foot pedal	Included
Die Rack	Included
Quick Change Tool	Included
Backstop Device	Optional
Control by Pressure	Optional
Noise Level dBA	65
Protection Class	IP56
L*W*H mm	680*600*1400
Weight KG	300